



**Totaalleverancier  
van lasers en medische  
technologieën**



Laservision Instruments BV  
+31 (0) 529 428 000

[www.laservision.nl](http://www.laservision.nl)  
[info@laservision.nl](mailto:info@laservision.nl)

# Compact and sleek instrument

Fits easily on any instrument table and allows for maximum patient interaction



TX-20  
Full Auto Tonometer



TX-20P  
Full Auto Tonometer &  
Pachymeter

## TX-20 and TX-20P

2 instruments, sharing the same advanced features

### Accurate, automatic and fast measurement at the push of a button

Due to its intelligent full 3D alignment functionality, the TX-20/P can start a complete examination with only a basic alignment on one eye. With a simple push of the button, the TX-20/P conducts automatic examination of both eyes from alignment to printing.

The advanced intelligent 3D fully automated operation makes operating the instrument extremely simple; just press the button. The TX-20/P will align and measure extremely fast, even the print-out and paper cut off are done automatically, reducing examination time.

The instrument's soft air puff and short examination time of the TX-20/P contribute to enhanced patient comfort.

The TX-20P model additionally has a built-in pachymeter, for measuring the central corneal thickness (CCT).





## Excellent ergonomics

The tilting 5.7" colour LCD screen makes it possible to operate the TX-20/P while standing or sitting



## Multifunctional joystick

Powered for extremely comfortable operation, all main functions are centralized in the joystick, allowing for the instrument to be operated by one hand.




## Fast built-in printer

Printer with easy drop-in paper loading and auto cutter. Comprehensive print-out with all relevant data



Multifunctional switches placed around the screen with a simple and logical function indication.

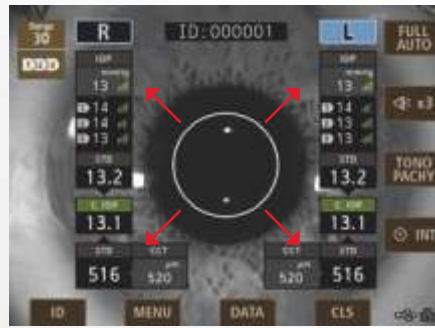

Limiter function  
A safety feature that prevents that the optical head makes physical contact with the patient's eye.



Extended connectivity  
USB host for inputting patient info by keyboard/barcode reader. LAN and RS-232C for connection to network. XML file output via LAN.






Upper IOP Warning  
Lower IOP Warning

### External Fixation

Besides the internal fixation light, the instrument is equipped with 2 external fixation lights. Effective for patients with a central vision defect.

### Upper and lower IOP warnings

To assist during screening; threshold values can be changed to your requirements.

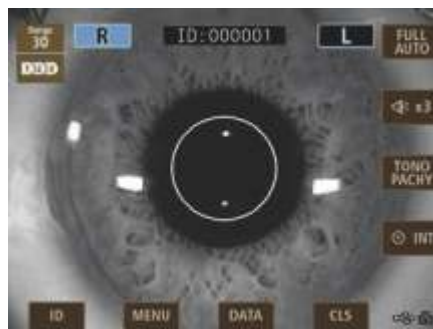

### Warning images

When there is a measurement error, a snapshot of the examinee's eye is displayed to indicate the possible cause of the error: obstruction by an eyelid or eyelashes. The TX-20P additionally has a Pachymeter measurement error screen.

Large magnification of the pupil for easy observation



Settings of the device can be adjusted to your preference

All measurement results are clearly displayed in one screen



## TX-20P

Two in one, tonometer and pachymeter in a single instrument.

Measure intraocular pressure (IOP) and central corneal thickness (CCT) together as well as automatically recalculate the compensated IOP with accuracy and speed. All in a single instrument.

### Pachymeter

Central corneal thickness measurement based on cross-sectional image of the slit image of the cornea.



Information about the actual corneal thickness is important because without it can mask accurate readings of IOP and delay diagnosis of glaucoma. Unless taken into account, thicker corneas contribute to overestimation of IOP values and thinner corneas to underestimation.

With the built-in pachymeter the TX-20P is much more than just a tonometer. It reduces the risk of misreading intraocular pressure and is set to make a significant contribution to detecting potential glaucoma in patients.



#### Compensated IOP

Automatic calculation of C.IOP based on the CCT value

Example	IOP (mmHg)	CCT (mm)
STD	12.9	5
C. IOP		13.9

#### Parameter setting for Compensated IOP

Use default settings or adjust the compensated IOP to your preference





## Specifications TX-20 / TX-20P

Dimensions	260 W x 490 L x 500 H mm	<b>Intra ocular pressure measurements</b>	
Weight	15 kg	Measurement principle	Air puff non-contact method
Display	Tilting 5,7 inch LCD screen	Measurement range	0 ~ 60 mmHg
Printer	Thermal Line Printer with auto cutter		Auto switching 30/60 mmHg range
Chinrest	Motorized	Measurement units	mmHg/hPa
Interface	USB host/ RS232C / LAN	Working Distance	11 mm
Power	AC 100 V to 240 V, 50/60 Hz, 0.8 A to 0.4 A		
Power Saving mode	YES	<b>Pachymeter Measurements (TX-20P only)</b>	
Optional accessories	Chin rest paper, printing paper	Measurement principle	Quantized slit image on central cornea
Fixation light	Internal or external	Measurement range	15 ~ 1300 microns
Input ID Options	Automatic serial number assignment or patient ID input via screen, numeric keyboard, barcode reader (optional)	Light source	Blue LED
Alignment	Fully automatic 3D alignment		
Measurement mode	Fully automatic / automatic / manual		

Canon has been defining the future with innovative solutions for more than 70 years. In all that time we've constantly strived to improve medical diagnostics in healthcare. Perhaps that's what made us a leading global provider of eye care solutions.



Canon Eco

Our actions are based on honesty and sustainability.



Canon Quality

Safety and quality are an integral component of our actions.



Canon Versatility

Everything we do has to have a significant customer benefit.

## Canon Eye Care product line up

### Retinal cameras

Non-Mydriatic



CR-2



CR-2 Plus AF

Mydriatic



CF-1

NM / Myd



CX-1

### Optical Coherence Tomography Measurement Equipment



OCT-HS100

Ref/Keratometer



RK-F2

Tonometer



TX-20

Tono/Pachymeter



TX-20P

## Optopol\* Eye Care product line up

### Optical Coherence Tomography Perimetry



Copernicus+



PTS-910



PTS-910 B/Y



PTS-1000

\* Optopol Technology S.A. is a Canon Group Company

Choose the eye care system of the future and let our local, authorized Canon dealer advise you:

**Canon**

TX-20P  
English Edition 0153W397  
© Canon Europa N.V. 2014

Canon Europa N.V.  
Medical Systems Division  
Bovenkerkerweg 59 – 61  
1185 XB Amstelveen  
The Netherlands  
[www.canon-europe.com/medical](http://www.canon-europe.com/medical)



De Grift 20  
7711 EJ, Nieuwleusen

[www.laservision.nl](http://www.laservision.nl) | [info@laservision.nl](mailto:info@laservision.nl) | 0529 - 428000 | [@laservision\\_instruments](https://www.instagram.com/laservision_instruments)